ENTRY 15

Capacity

Kg

40	+90°C ↓ +3°C
28	+90°C ↓ -18°C

Trays

73	*Trays pitch [mm]*
15	GN 1/1 (H40 - 65)
15	GN 1/1 (H20)
15	EN 60/40

Functions

Shock Freezing	Blast chilling	Fish sanitation	Ice cream hardening	Pastry
Pre-cooling	Air defrosting			

CONSTRUCTION FEATURES

- 4.3'' touch screen controller
- Unibody AISI 304 stainless steel
- Rounded internal corners
- CFC free highdensity polyurethane insulation
- Evaporator with cataphoresis rust protection
- Door hinge on left side
- Heated door perimeter
- External drip tray
- Single core probe

CYCLES AND SOFTWARE

- Probe cycles
- Time cycles
- Cookbook
- HACCP data collection.

ACCESSORIES

- EN tray holder
- Lock predisposition

OPTIONALS

- Door opening hook
- Wifi connection
- Right hinged door
- Machine with wheels
- Wooden cage packaging
- Wooden crate packaging

TECHNICAL DATA

	PlugIn Air	Remote	H2O PlugIn	CO2 provision
Temperature range [°C]		-40/+20		
Cooling power (evap. -10°C / cond. 45°C) [W]	3244	-	3244	-
Required cooling capacity [W]	-	-	-	-
ø liquid line ['] [mm]	-	-	-	-
ø suction line ['] [mm]	-	-	-	-
Condensation	Air cooled	-	Water cooled	-
Refrigerant gas	R290	-	R290	-
GWP	3	-	3	-
Climatic class	5	-	5	-
Power supply [V/ph/Hz]	220-240/1N/50	-	220-240/1N/50	-
Max absorption cold cycles [W/A]	2007/10,45	-	1911/9,45	-
Max absorption hot cycles [W/A]	-	-	-	-
Blast chilling capacity (+90°C/+3°C) [kg]	40	-	40	-
Freezing capacity (+90°C/-18°C) [kg]	28	-	28	-
Inside dimensions WxDxH [mm]	615x417x1140	-	615x417x1140	-
External dimensions WxDxH [mm]	715x695x1921	-	715x695x1921	-
Internal capacity [L]	292	-	292	-
Packaging dimensions WxDxH [mm]	730x755x2046	-	730x755x2046	-
Packing volume [m3]	1,1	-	1,1	-
Gross weight [kg]	175	-	175	-
Net weight [kg]	159	-	159	-
Gas charge [g]	300	-	210	-

EN22042

65°C / +10°C	kWh/Kg	0,045	65°C / -18°C	kWh/Kg	0,182
	min	103		min	266
	Kg	75		Kg	40

GASTRONOMY

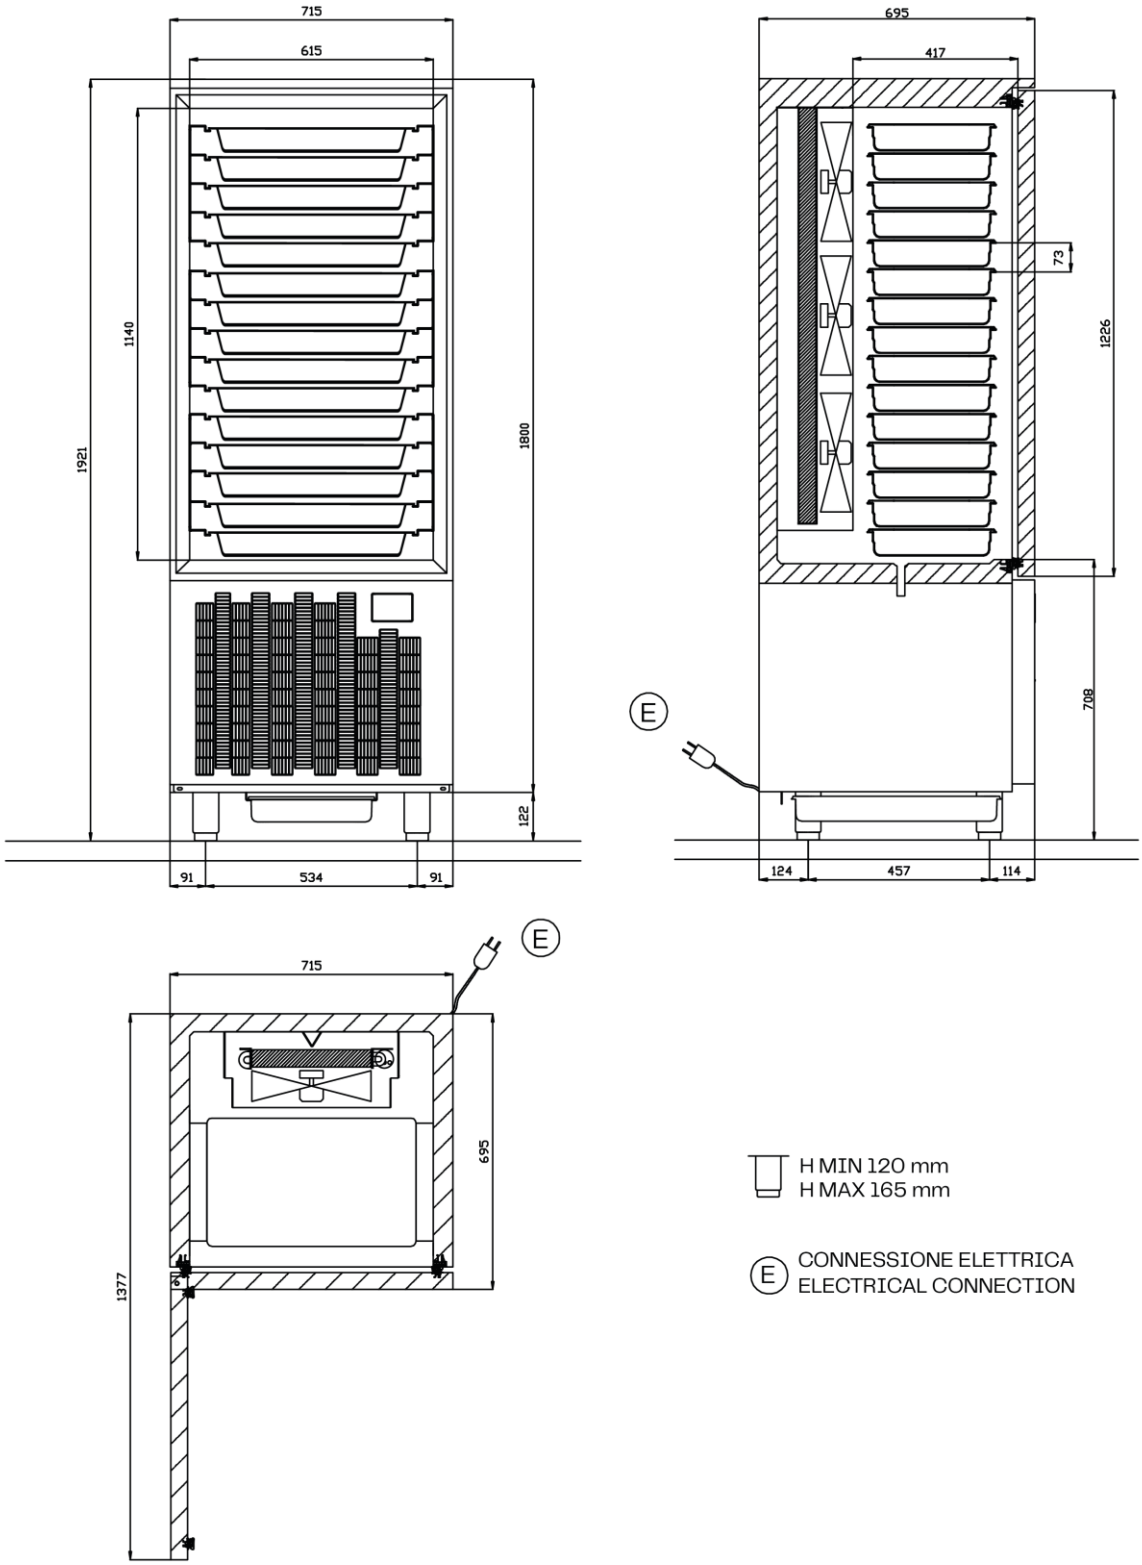
715
615
1140
1921
1800
122
91
534
91
695
417
73
1226
708
E
124
457
114
715
E
695
1377
H MIN 120 mm
H MAX 165 mm
E
CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION

PASTRY

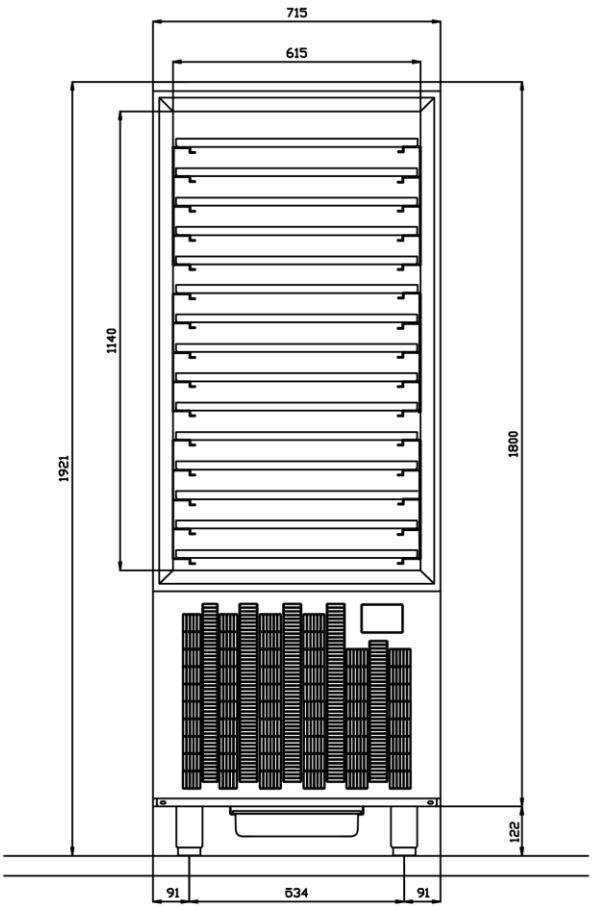

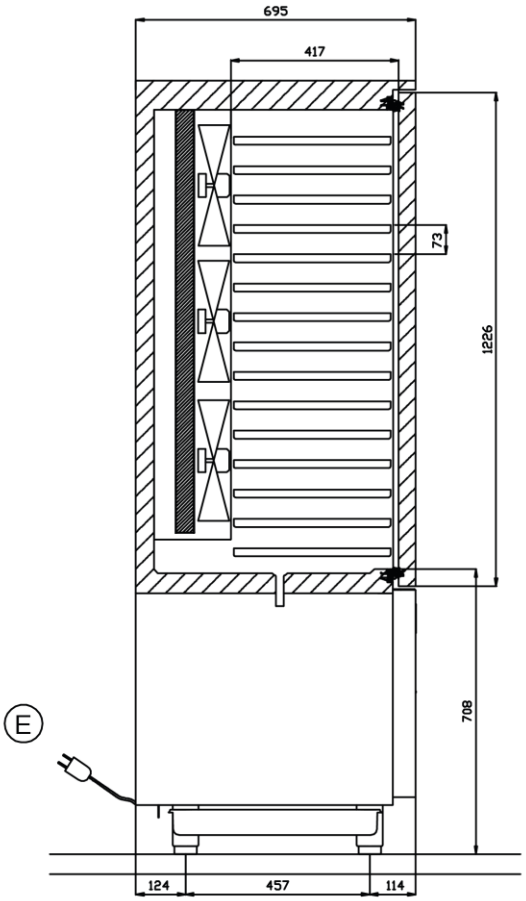

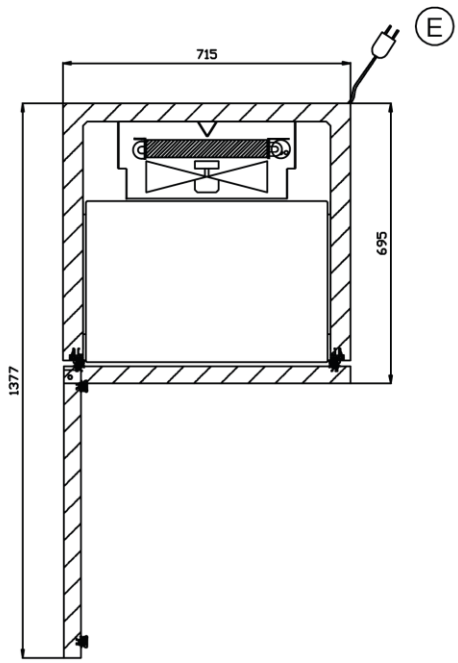

H MIN 120 mm
H MAX 165 mm

E CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION

ICE-CREAM

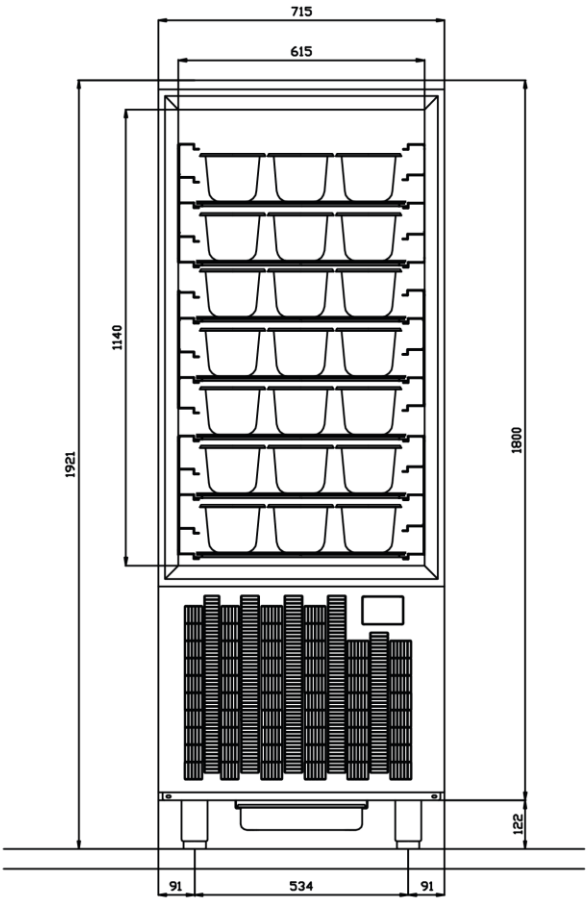

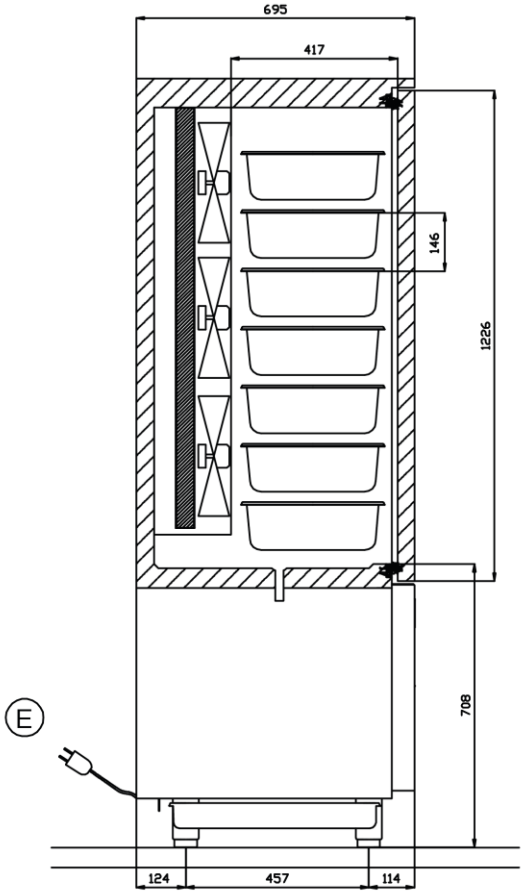

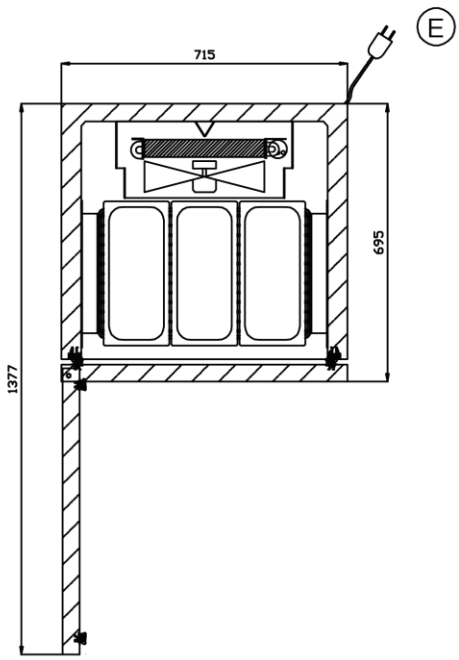

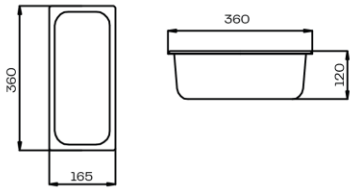

H MIN 120 mm
H MAX 165 mm

E CONNESSIONE ELETTRICA
ELECTRICAL CONNECTION